


SVS側溝カセットウォール400構造図





設計条件

$$\gamma = 19.0(\text{kN}/\text{m}^3)$$

$$\phi = 30.00(^{\circ})$$

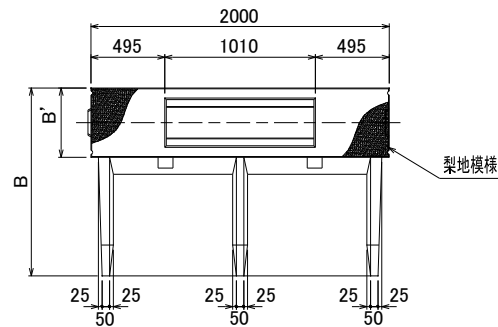

ジョイント金具

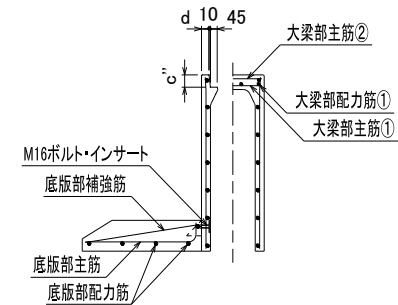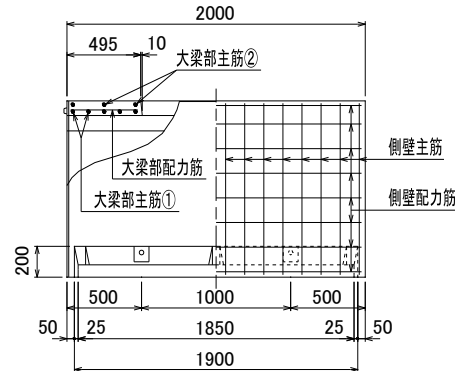

寸法 * 重量表


呼 び 名	寸 法 (mm)								本体重量 (kg)	車 道 用 (q = 10.0 kN / m ²)						軽 荷 重 用 (q = 3.5 kN / m ²)					
										寸 法 (mm)					底版重量 (kg)	寸 法 (mm)					底版重量 (kg)
	呼び名 b	B	b ₁	b ₂	t	呼び名 b	B	b ₁		b ₂	t										
400 × 400	530	560	400	400	110	95	60	65	478	400	930	150	150	50	170	350	880	150	150	50	155
× 500	530	660	400	500	110	95	60	65	539	450	980	150	150	50	184	350	880	150	150	50	155
× 600	530	760	400	600	110	95	60	65	600	500	1030	150	150	50	199	350	880	150	150	50	155
× 700	530	860	400	700	110	95	60	65	661	550	1080	145	145	55	221	350	880	150	150	50	155
× 800	530	960	400	800	110	95	60	65	722	600	1130	140	140	60	245	350	880	150	150	50	155
× 900	530	1060	400	900	110	95	60	65	783	650	1180	135	135	65	271	400	930	150	150	50	170
× 1000	530	1160	400	1000	110	95	60	65	844	700	1230	130	130	70	300	450	980	150	150	50	184
× 1100	530	1260	400	1100	110	95	60	65	906	750	1280	125	125	75	331	500	1030	150	150	50	199
× 1200	530	1360	400	1200	110	95	60	65	967	800	1330	120	120	80	363	500	1030	150	150	50	199

SVS側溝カセットウォール500構造図





設計条件

$$\gamma = 19.0(\text{kN}/\text{m}^3)$$

$$\phi = 30.00(^{\circ})$$

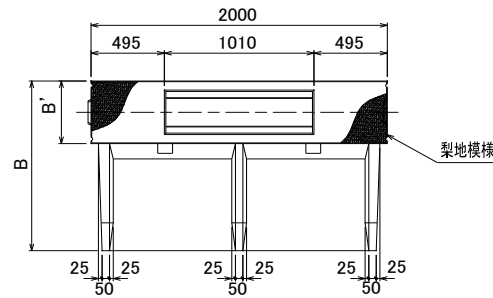

ジョイント金具

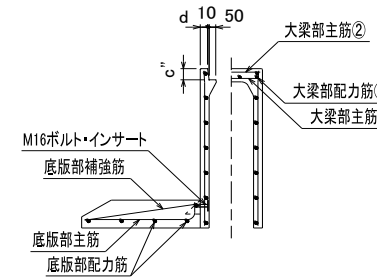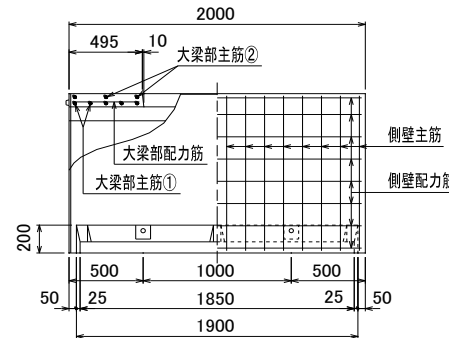

寸法 * 重量表


呼 び 名	寸 法 (mm)								本体重量 (kg)	車 道 用 (q = 10.0 kN / m ²)					軽 荷 重 用 (q = 3.5 kN / m ²)						
										寸 法 (mm)				底版重量 (kg)	寸 法 (mm)				底版重量 (kg)		
										呼び名 b	B	b1	b2		t	呼び名 b	B	b1		b2	t
500 × 400	640	575	500	400	125	110	65	70	563	350	990	150	150	50	155	350	990	150	150	50	155
× 500	640	675	500	500	125	110	65	70	629	450	1090	150	150	50	184	350	990	150	150	50	155
× 600	640	775	500	600	125	110	65	70	695	500	1140	150	150	50	199	350	990	150	150	50	155
× 700	640	875	500	700	125	110	65	70	760	550	1190	145	145	55	221	350	990	150	150	50	155
× 800	640	975	500	800	125	110	65	70	826	600	1240	140	140	60	245	350	990	150	150	50	155
× 900	640	1075	500	900	125	110	65	70	892	650	1290	135	135	65	271	350	990	150	150	50	155
× 1000	640	1175	500	1000	125	110	65	70	958	700	1340	130	130	70	300	400	1040	150	150	50	170
× 1100	640	1275	500	1100	125	110	65	70	1024	750	1390	125	125	75	331	450	1090	150	150	50	184
× 1200	640	1375	500	1200	125	110	65	70	1089	800	1440	120	120	80	363	500	1140	150	150	50	199
× 1300	640	1475	500	1300	125	110	65	70	1155	850	1490	115	115	85	397	550	1190	145	145	55	221
× 1400	640	1575	500	1400	125	110	65	70	1221	850	1490	115	115	85	397	600	1240	140	140	60	245

SVS側溝カセットウォール600構造図

設計条件

$$\gamma = 19.0(\text{kN/m}^3)$$

$$\phi = 30.00(^{\circ})$$

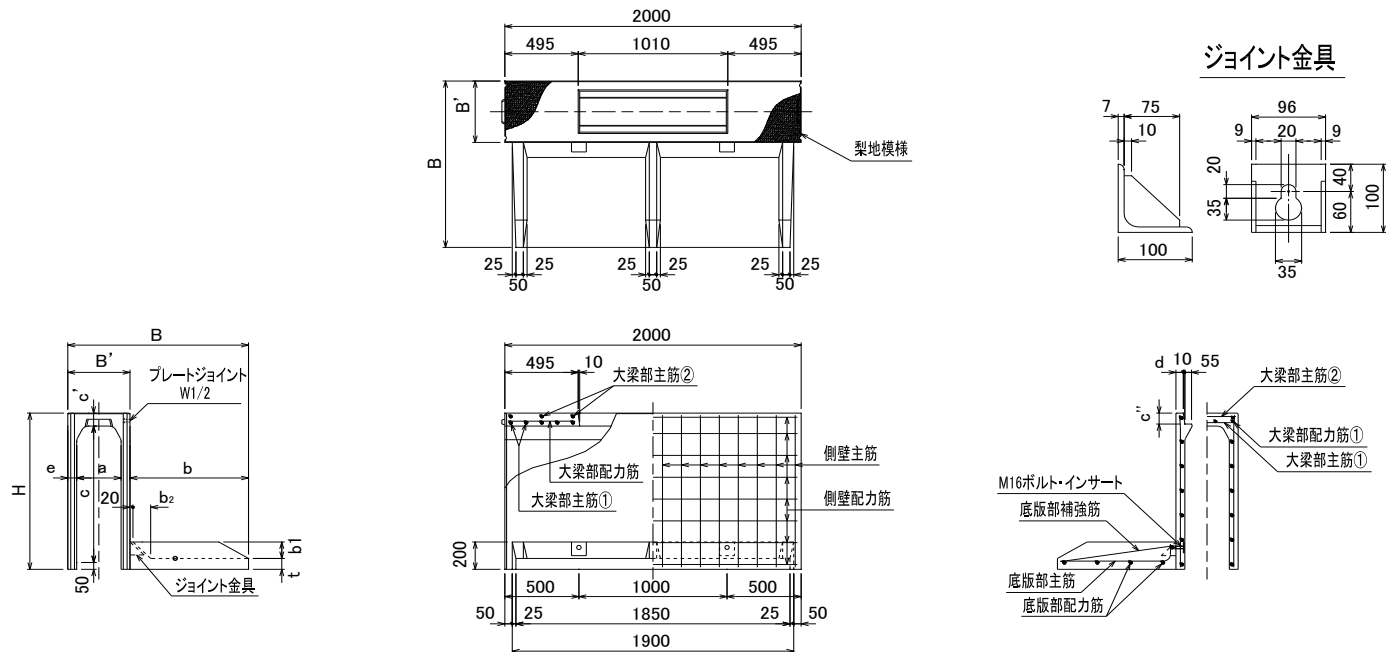

寸法 * 重量表

呼 び 名	寸 法 (mm)								本体重量 (kg)	車 道 用 (q = 10.0 kN / m ²)					底版重量 (kg)	軽 荷 重 用 (q = 3.5 kN / m ²)					底版重量 (kg)
	寸 法 (mm)									寸 法 (mm)				寸 法 (mm)							
	B'	H	a	c	c'	c''	d	e		呼び名 b	B	b1	b2	t		呼び名 b	B	b1	b2	t	
600 × 500	750	690	600	500	140	125	70	75	727	400	1150	150	150	50	170	350	1100	150	150	50	155
× 600	750	790	600	600	140	125	70	75	798	450	1200	150	150	50	184	350	1100	150	150	50	155
× 700	750	890	600	700	140	125	70	75	868	500	1250	150	150	50	199	350	1100	150	150	50	155
× 800	750	990	600	800	140	125	70	75	939	550	1300	145	145	55	221	350	1100	150	150	50	155
× 900	750	1090	600	900	140	125	70	75	1009	600	1350	140	140	60	245	350	1100	150	150	50	155
× 1000	750	1190	600	1000	140	125	70	75	1080	650	1400	135	135	65	271	400	1150	150	150	50	170
× 1100	750	1290	600	1100	140	125	70	75	1150	700	1450	130	130	70	300	450	1200	150	150	50	184
× 1200	750	1390	600	1200	140	125	70	75	1221	750	1500	125	125	75	331	500	1250	150	150	50	199
× 1300	750	1490	600	1300	140	125	70	75	1291	800	1550	120	120	80	363	550	1300	145	145	55	221
× 1400	750	1590	600	1400	140	125	70	75	1362	850	1600	115	115	85	397	550	1300	145	145	55	221
× 1500	750	1690	600	1500	140	125	70	75	1432	900	1650	110	110	90	434	600	1350	140	140	60	245